

RESOLUTION NO. R16-765

A RESOLUTION TO AUTHORIZE ACQUISITION OF PAVING SERVICES UTILIZING CERTAIN 2016 LOCAL MAINTENANCE AND IMPROVEMENT GRANT ("LMIG") FUNDS

WHEREAS, the City of Stockbridge ("City") is a municipal corporation duly organized and existing under the laws of the State of Georgia and is charged with being fiscally responsible concerning the use and expenditure of all public funds; and

WHEREAS, the City proposes to conduct certain paving and roadway maintenance as part of its 2016 LMIG Program;

WHEREAS, Blount Construction Company, Inc. was the lowest, responsible bidder on the project;

THEREFORE, THE CITY COUNCIL OF THE CITY OF STOCKBRIDGE HEREBY RESOLVES:

SECTION 1. Approval of Purchase. The purchase of certain paving and road maintenance services from Blount Construction Company, Inc., as presented to the City Council on October 25, 2016 in the amount of \$704,380.90 is hereby approved by the City Council.

SECTION 2. Public Record. This document shall be maintained as a public record by the City Clerk and shall be accessible to the public during all normal business hours of the City of Stockbridge.

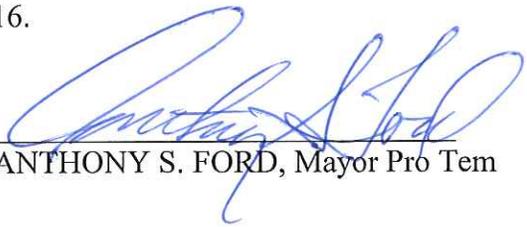
SECTION 3. Authorization of Execution. The Mayor is hereby authorized to sign all documents necessary to effectuate this Resolution.

SECTION 4. Attestation. The City Clerk is authorized to execute, attest to, and seal any documents which may be necessary to effectuate this ordinance, subject to approval as to form by the City Attorney.

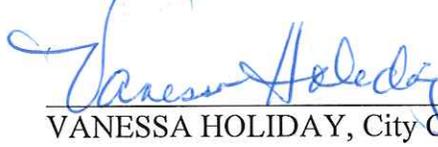
SECTION 5. Effective Date. This resolution shall become effective immediately upon its adoption by the Mayor and City Council of the City of Stockbridge as provided in the City Charter.

[SIGNATURES APPEAR ON FOLLOWING PAGE]

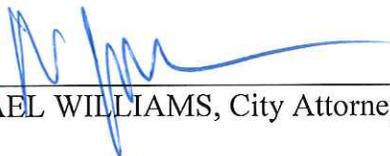
SO RESOLVED this 25th day of October, 2016.


ANTHONY S. FORD, Mayor Pro Tem

ATTEST:

 (SEAL)
VANESSA HOLIDAY, City Clerk

APPROVED AS TO FORM:


MICHAEL WILLIAMS, City Attorney

SC-6.17 *Shop Drawings and Samples*

SC-6.17 Add the following new paragraphs immediately after Paragraph 6.17.E:

F. Contractor shall furnish required submittals with sufficient information and accuracy in order to obtain required approval of an item with no more than three submittals. Engineer will record Engineer's time for reviewing subsequent submittals of Shop Drawings, samples, or other items requiring approval and Contractor shall reimburse Owner for Engineer's charges for such time.

G. In the event that Contractor requests a change of a previously approved item, Contractor shall reimburse Owner for Engineer's charges for its review time unless the need for such change is beyond the control of Contractor.

SC-7 *Technical Specifications*

SC-7 Technical Specifications for use with the City of Stockbridge, GA 2016 LMIG Program shall be per the "Georgia Department of Transportation – Standard Specifications Construction of Transportation Systems – June 21, 2001 or latest revision"

SC-8 *Project Drawing*

SC-8 An area map "City of Stockbridge, GA – 2016 LMIG Program" is attached to these documents and defines the limits of the 2016 LMIG Program.

SC-9 *Project Road List*

List of all roads included in the Stockbridge 2016 LMIG Program with approximate dimensions and proposed improvements.

- **Oak Hill Terrace** – From Center Street To Dead End: ±290 L.F. X 20' Wide, Entrance 38' Wide With Center Landscape Island, Full Curb And Gutter Or Concrete Edge, 24' X 15' Parking Area Included.
 - **Proposed Improvements**
 - Remove Entire Asphalt Road Surface And Compact Subgrade, Overlay Entire Surface With 1.5" Of 12.5mm

Shoulder Backfill And Grassing, Adjust (1) Water Valve To Grade, Install (2) Thermoplastic White Stop Bar.

- **Payton Court** – From Cul-De-Sac To Cul-De-Sac: ± 1037 L.F. X 23' Wide W/ (2) 80' Cul-De-Sacs And Full Concrete Curb And Gutter.

- **Proposed Improvements**

- Edge Mill Along Curb And Gutter, Raise To Grade (5) Sanitary Sewer Manholes, Overlay Entire Surface With 1.5" Of 12.5mm Superpave.

- **Whitaker Drive** – From Brentwood Parkway To Cul-De-Sac: ± 1638 L.F. X 23' Wide W/ (1) 80' Cul-De-Sac And Full Concrete Curb And Gutter.

- **Proposed Improvements**

- Edge Mill Along Curb And Gutter, Raise To Grade (8) Sanitary Sewer Manholes, Overlay Entire Surface With 1.5" Of 12.5mm Superpave, Install (1) Thermoplastic White Stop Bar.

- **Bruin Court** – From Whitaker Drive To Cul-De-Sac: ± 782 L.F. X 23' Wide W/ (1) 80' Cul-De-Sac And Full Concrete Curb And Gutter.

- **Proposed Improvements**

- Edge Mill Along Curb And Gutter, Excavate (2) 10' X 20' Pavement Section With Base Failure And Install Asphalt Patch, Raise To Grade (3) Sanitary Sewer Manholes, Overlay Entire Surface With 1.5" Of 12.5mm Superpave, Install (1) Thermoplastic White Stop Bar.

- **Gresham Drive** – From Brentwood Parkway To Cul-De-Sac: ± 2280 L.F. X 22' Wide, Entrance Width Varies From 36' To 22' Typical, W/ (1) 80' Cul-De-Sac And Full Concrete Curb And Gutter.

- **Proposed Improvements**

- Edge Mill Along Curb And Gutter, Raise To Grade (13) Sanitary Sewer Manholes, Overly First 1400 L.F. With 1" Permaflex Asphalt Course, Overlay Entire Surface With 1.5" Of 12.5mm Superpave, Install (1) Thermoplastic White Stop Bar.

- Edge Mill Along Curb And Gutter, Excavate (2) 30' X 20' Pavement Section With Base Failure Install Asphalt Patch @ Goldfinch Way, Raise To Grade (3) Sanitary Sewer Manholes, Overlay Entire Surface With 1.5" Of 12.5mm Superpave.
- **Summer Hill Circle** – From Banks Road To Summer Hill Circle: ±3870 L.F. X 23' Wide, Entrance Is 48' Wide With Center Island (2- 17' Lanes), W/ (1) 80' X 90' Cul-De-Sac And (1) Partial Cul-De-Sac And Full Concrete Curb And Gutter.

- **Proposed Improvements**

- Edge Mill Along Curb And Gutter, Raise To Grade (18) Sanitary Sewer Manholes, Overlay Entire Surface With 1" Permafex Asphaltic Course, Overlay Entire Surface With 1.5" Of 12.5mm Superpave, Install (7) Thermoplastic White Stop Bars.
- **Inverness Avenue** – From U.S. Hwy. 23/Ga. State Route 42 To Cul-De-Sac: ±1820 L.F. X 23' Wide, Includes An Excel/Decal Lane On U.S. Hwy. 23/Ga. State Route 42, Entrance Is 47' Wide With Center Island (2- 18' Lanes), W/ (1) 80' Cul-De-Sac And Full Concrete Curb And Gutter.

- **Proposed Improvements**

- Edge Mill Along Curb And Gutter, Raise To Grade (8) Sanitary Sewer Manholes, Install Asphalt Leveling Course 200' X 12' Adjacent To Pool Entrance, Overlay Entire Surface With 1.5" Of 12.5mm Superpave, Install (1) Thermoplastic White Stop Bar.

